



FOR ALUMINUM DOORS

A Rim Panic Exit Devices

LOCK STILE
INSIDE FACE



NOTE: FOR KEY CYLINDER ONLY
DRILL 7/32" HOLES AND COUNTERSINK (2)
AND DRILL 1/2" CYLINDER SPINDLE HOLE

39-17/32"
BOTTOM OF
STILE TO
THIS LINE



39-17/32"
BOTTOM OF
STILE TO
THIS LINE




FOLD DOWN ALONG THIS LINE AND PLACE AGAINST DOOR JAMB — LHRB DOOR

FOLD DOWN ALONG THIS LINE AND PLACE AGAINST DOOR JAMB — RHRB DOOR

FOR ALUMINUM DOORS

A Rim Panic Exit Devices

LOCK STILE
OUTSIDE FACE

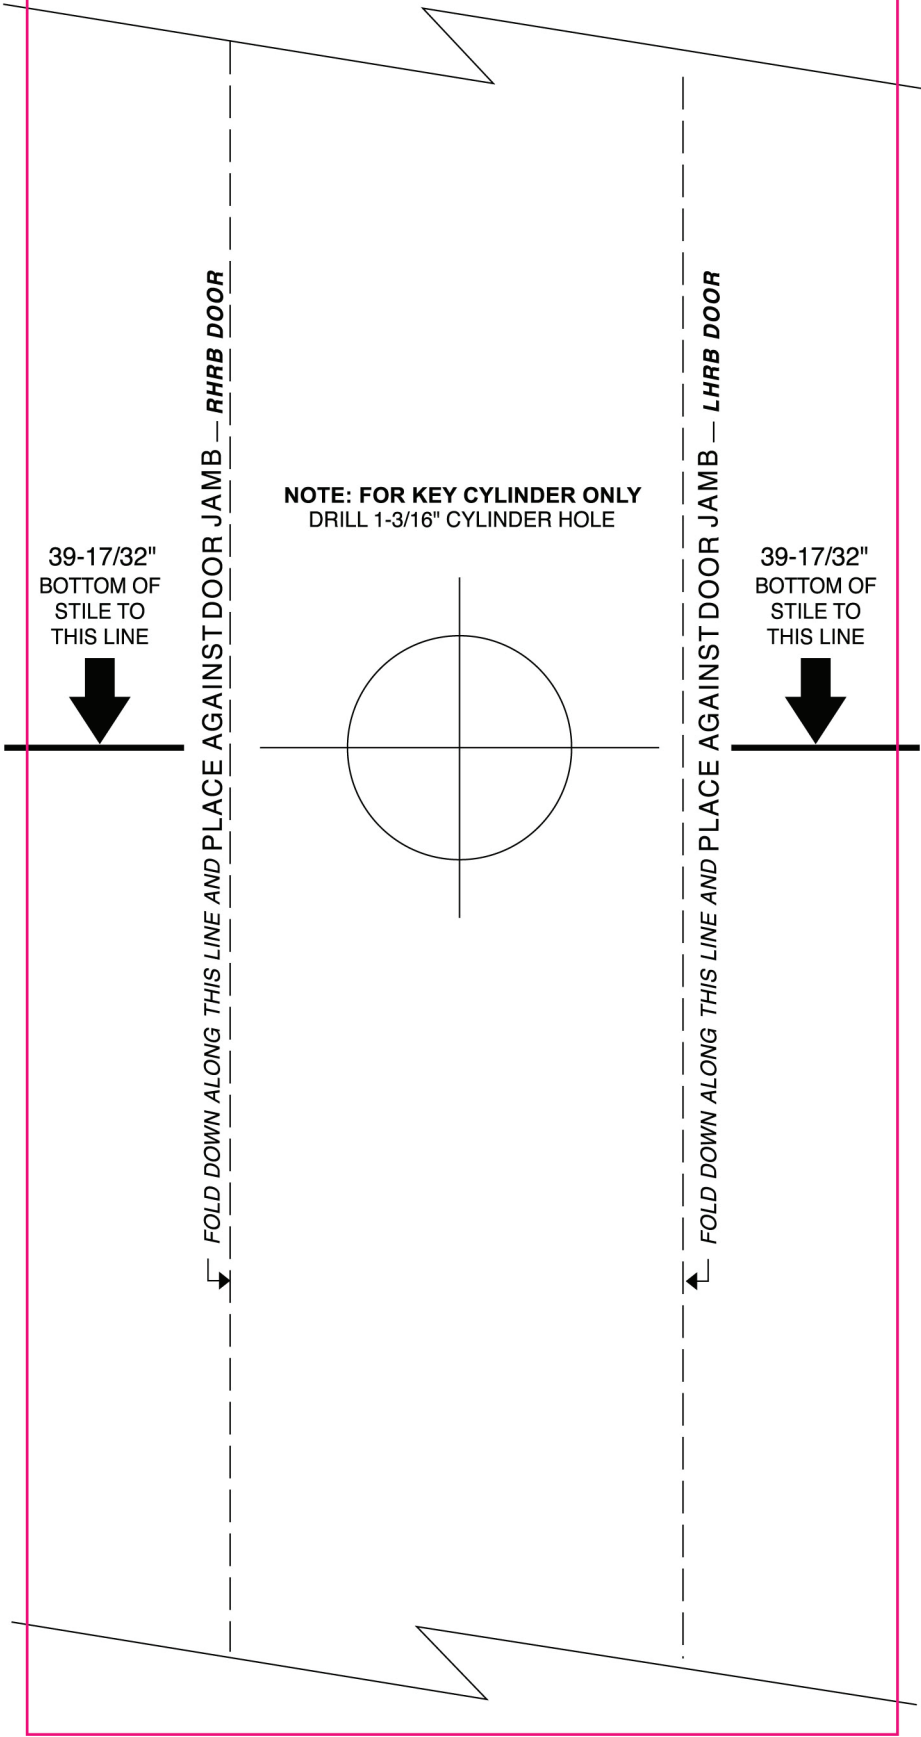


39-17/32"
BOTTOM OF
STILE TO
THIS LINE



FOLD DOWN ALONG THIS LINE AND PLACE AGAINST DOOR JAMB — RHRB DOOR

NOTE: FOR KEY CYLINDER ONLY
DRILL 1-3/16" CYLINDER HOLE



FOLD DOWN ALONG THIS LINE AND PLACE AGAINST DOOR JAMB — LHRB DOOR

39-17/32"
BOTTOM OF
STILE TO
THIS LINE

