


### GRADE 2 TOUCH BAR EXIT DEVICE



#### SPECIFICATIONS

- Certification: ANSI A156.3 Grade 2
- Material: Extruded anodized aluminum push bar, stainless steel springs
- Latch: Stainless Steel, 3/4" throw - 5/8" deadlatch
- Backset: 2-3/4" Covers 161 prep, includes latch & strike filler plates
- Strike: Surface mounted for 5/8" stop with shim, double door strike available
- Projection: 2-1/2" - 1-7/8" dogged
- Stile: 4-1/4" minimum
- Handing: Reversible, non-handed
- Door Thickness: 1-3/4" standard
- Door Width: 36" (field adjustable to 30") or 48"
- Mounting Height: Recommended installation at 41" from finished floor to center line of push rail.
- Fasteners: Furnished with sheet metal and machine screws
- Cylinder: Rim included, all key trims cylinder included except PLED
- Dogging: 1/2 turn hex key
- Fire Rated: 3-hour fire rated available - please specify
- Finishes: Aluminum and Stainless Steel, Black
- Limited warranty: 10 years

#### HOW TO ORDER

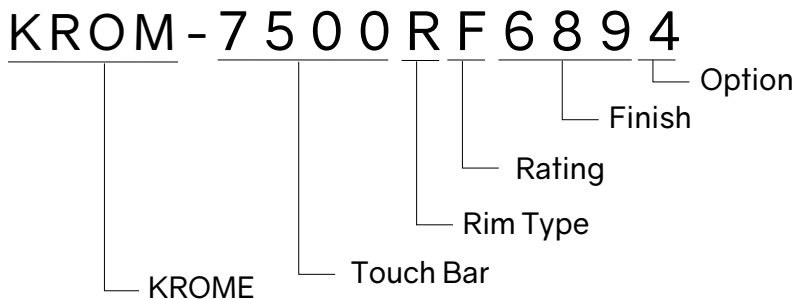

Item Number	Rating	Finish	Length
7500R	3H Fire Rated (F) Non fire rated (blank)	Aluminum (689) Stainless Steel (630) Black (693)	36" (bank) 48" (4)
Notes: Default 36"			