


GRADE 2 TOUCH BAR EXIT DEVICE



SPECIFICATIONS

- Certification: ANSI A156.3 Grade 2
- Material: Extruded anodized aluminum push bar, stainless steel springs
- Latch: Stainless Steel, 3/4" throw - 5/8" deadlatch
- Backset: 2-3/4" Covers 161 prep, includes latch & strike filler plates
- Strike: Surface mounted for 5/8" stop with shim, double door strike available
- Projection: 2-1/2" - 1-7/8" dogged
- Stile: 4-1/4" minimum
- Handing: Reversible, non-handed
- Door Thickness: 1-3/4" standard
- Door Width: 36"(field adjustable to 30") or 48"
- Mounting Height: Recommended installation at 41" from finished floor to center line of push rail.
- Fasteners: Furnished with sheet metal and machine screws
- Cylinder: Rim included, all key trims cylinder included except PLED
- Dogging: 1/2 turn hex key
- Fire Rated: 3-hour fire rated available - please specify
- Finishes: Aluminum and Stainless Steel, Black
- Limited warranty: 10 years

HOW TO ORDER

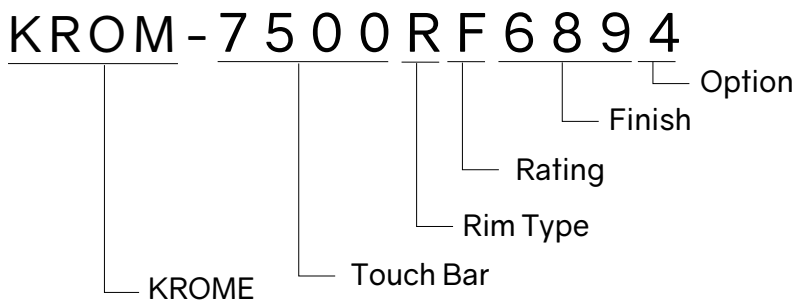

Item Number	Rating	Finish	Length
7500R	3H Fire Rated (F) Non fire rated (blank)	Aluminum (689)	36" (blank)
		Stainless Steel (630)	48" (4)
		Black (693)	36" (blank)
7500R (no deadlatch)	Non fire rated (blank)	Aluminum (689) Stainless Steel (630)	36" (blank)

Notes: Default 36"